




TECHNICAL DATA

Series SWR-F16-4 Doors Frames
For Metal Buildings

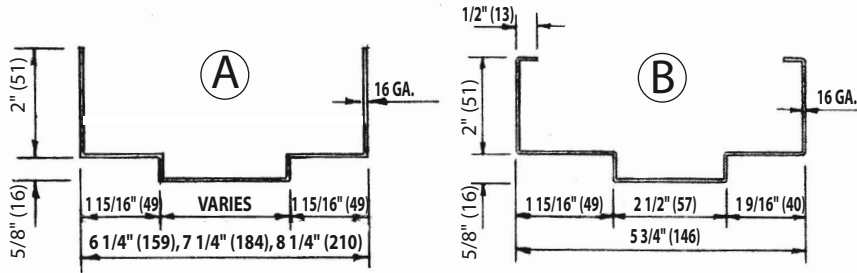

FRAME DEPTH


DESIGN PRESSURE CONVERSION

DESIGN PRESSURE	WIND VELOCITY
25 PSF	100 MPH
50 PSF	142 MPH

SINGLE




DOUBLE




WITH INTERMEDIATE GIRT

SINGLE



DOUBLE



SWING		FRAME TYPE		MAXIMUM SIZE	DESIGN PRESSURE
SINGLE	PAIRS	(A)	(B)		
●		●	●	4080	25 PSF
	●	●	●	6070	

SWING		FRAME TYPE		MAXIMUM SIZE	DESIGN PRESSURE
SINGLE	PAIRS	(A)	(B)		
●		●	●	4080	50 PSF
	●	●	●	6070	

Door frames were tested at an independent testing laboratory and are classified and comply with Underwriters Laboratories, Inc. follow-up procedure. Test specimens were evaluated in accordance with test procedures; ANSI A250. 13-03, ASTM E330-02, ASTM E1886-02, ASTM E1996-02, and Florida Building Code TAS 201, 202, and 203.